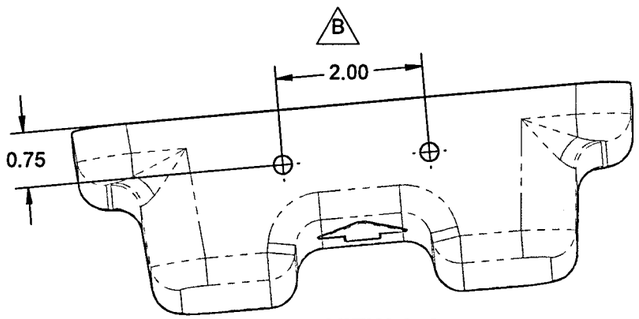

VIEW A-A D6-1

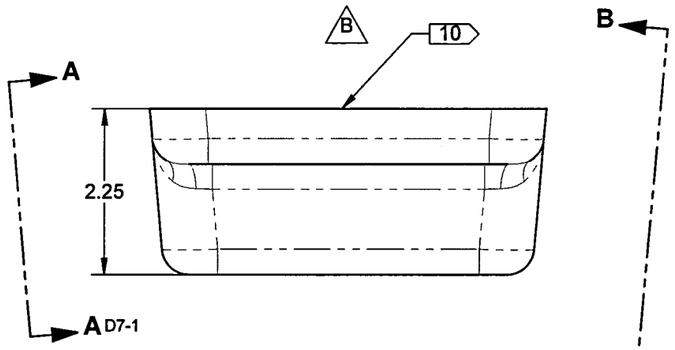

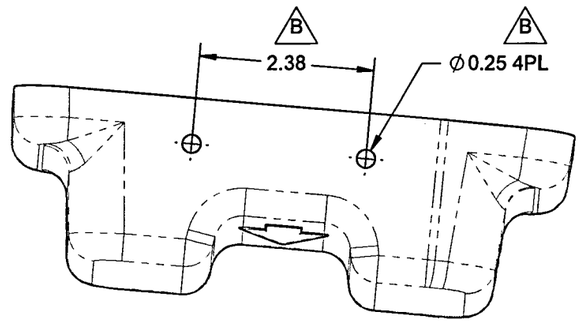

VIEW B-B D4-1

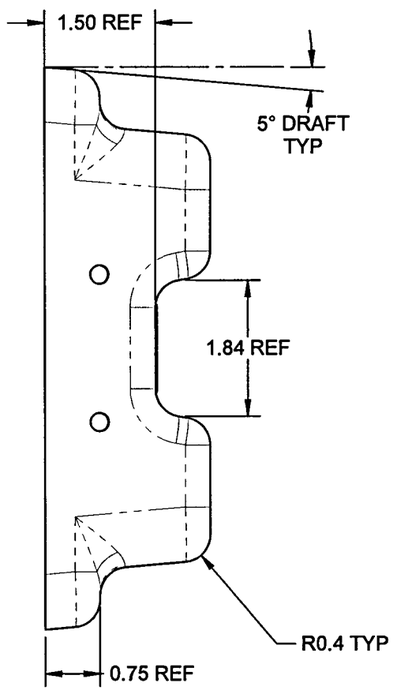

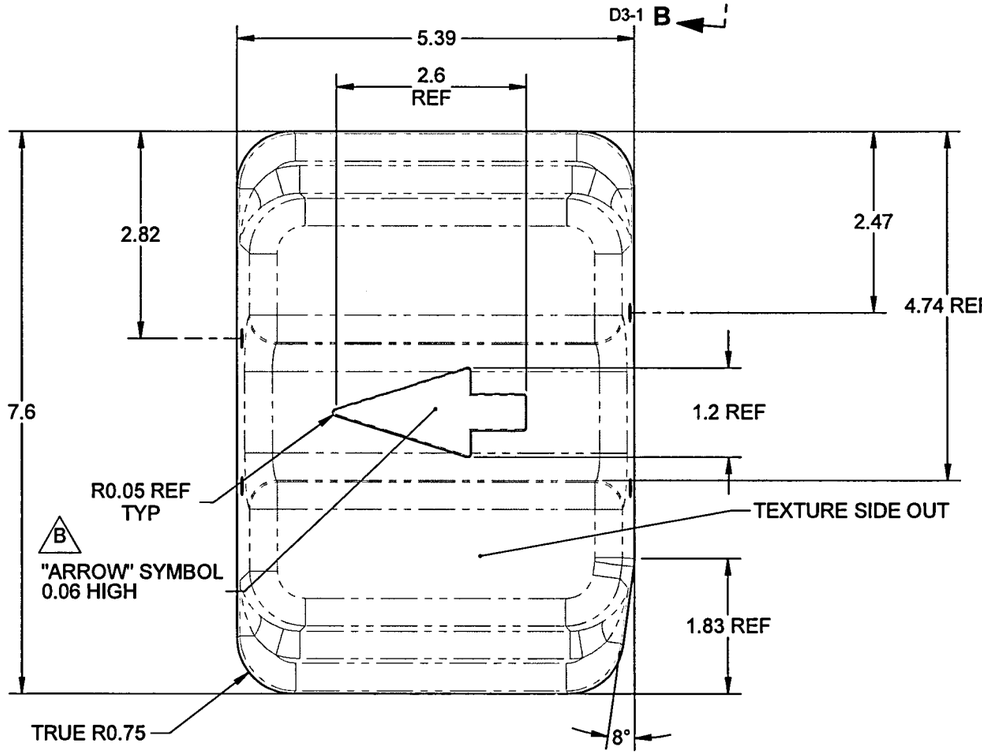

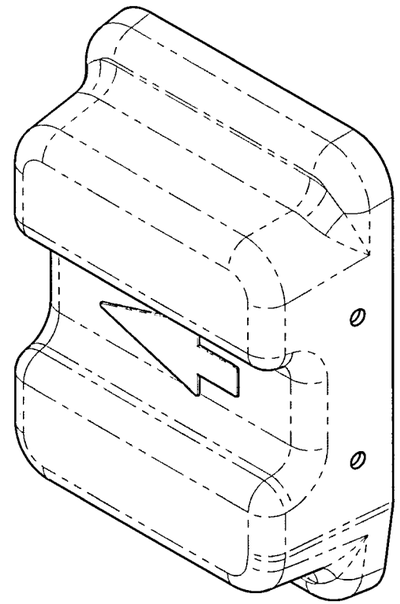

RELEASED
2013 -05- 16

D4778-1 STUB COVER

NOTES:
1) MATERIAL: MLEXS.093-F6006-02 (LEXAN POLYCARBONATE, BLACK, .093")
2) FINISH: NONE
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY WITH DART P/N "D4778-1" AND B/N PER DART QSI 044 METHOD 6.4
7) WEIGHT: 0.34 lbs
8) TOOLING: THERMOFORM PER MOLD DT9887 PER QSI 022. TRIM PER MOLD.
9) MINIMUM MATERIAL THICKNESS AFTER FORMING IS 0.040"
10)BOTTOM EDGE MAY BE TRIMMED, AS REQUIRED, TO ACCOMODATE VARIATIONS IN FLOOR SURFACE

REV.	DESCRIPTION	BY	DATE
B	DIMENSIONAL TOLERANCES RELAXED (ZN D2-1, ZN D3-1, ZN D7-1), ADD TRIM NOTE 10 (ZN D5-1), ADD ARROW (ZN B6-1)	DB	13.04.03
A	NEW RELEASE	DB	13.03.01

DESIGN	DB	**DART AEROSPACE LTD**
DRAWN	DB	HAWKESBURY, ONTARIO, CANADA
CHECKED	A.P.	DRAWING NO. D4778 — REV. B
MFG. APPR.		SHEET 1 OF 1
APPROVED		TITLE: STUB COVER — SCALE: NTS
DE APPR.		
DATE	13.04.03	

COPYRIGHT © 2013 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.